Mini Excavators

D-SERIES

CX12D | CX14D | CX15EV | CX17D | CX18D
CX19D | CX20D | CX22D | CX24D | CX25EV
CX25D | CX30D | CX35D | CX38D | CX42D
CX45D | CX50D | CX55D | CX58D | CX60D
CX65D



CASE CONSTRUCTION

21 MODELS FROM 1 TO 6.5 TONS



CX12D
11.8 hp
1.3 t

CX14D
11.8 hp
1.3 t

CX17D
16.1 hp
1.7 t - 1.8 t

CX18D
16.1 hp
1.8 t - 1.9 t

CX19D
18.4 hp
1.9 t - 2.0 t



CX20D
18.4 hp
2.0 t - 2.1 t



CX22D
20.7 hp
2.2 t - 2.3 t



CX25D
18.4 hp
2.6 t - 2.7 t



CX30D
24.4 hp
3.1 t - 3.2 t



CX35D
24.4 hp
3.5 t

CX38D
24.4 hp
3.9 t

CX42D
43.3 hp
4.3 t

CX45D
43.3 hp
4.7 t

CX50D
57.1 hp
4.9 t



CX55D
57.1 hp
5.4 t

CX58D
59.4 hp
5.7 t

CX60D
59.4 hp
6.0 t

CX65D
59.4 hp
6.5 t

SPECIAL APPLICATIONS



CX24D - 2 PIECE BOOM
20.7 hp
2.4 t - 2.5 t

ELECTRIC VEHICLE



CX15EV
11.0 kW
1.4 t

CX25EV
25.0 kW
2.3 t - 2.4 t

D SERIES
MINI EXCAVATOR

SCAN OR CLICK QR
TO WATCH THE FULL
WALKAROUND

KEY ADVANTAGES ON ALL MODELS

1 RUST PROOF BODY, ZERO TAIL SWING

The rust proof body and Zero Tail Swing (Z.T.S.) keep your investment protected.

Zero Tail Swing is nowadays a must for road maintenance and urban jobs:
- Safer, it reduce the probability of hazards during uppercarriage rotation;
- Less operator stress with maximum maneuverability and productivity.

Note: CX14D, CX15EV, CX22D, CX25EV and 2-piece boom models are short radius, they feature a limited tail overhang. The rest of the range is fully ZTS.

2 ADVANCED CONTROLS

Find the controls solutions of the upper class on all models:
- Auxiliary circuits proportional joystick control on all models (b);
- Swing control on the left joystick standard (b);
- AUX3 grapple provision optional
- Mulcher provision, available from CX19D;
- Advanced attachment settings like on heavy excavators available from CX42D;
- Electro-proportional engine rpm control with auto-idle available from CX30D.

(b) except CX17D and CX18D with conventional pedals

3 MAXIMUM COMFORT

Appreciate on any model the comfort of an upper-class machine:
- LED illuminates your long working days;
- Cell phone and bottle holders
- Assisted lift 4.0 enables easy removal and storage of the lower window;
- All cab/canopy are tiltable, fast opening for greater service access.

4 7-YEAR CONNECTIVITY

To further enhance your experience, connectivity is available across the entire range, including a 7-year free access to myCASECONSTRUCTION. This service is provided as standard from the CX22D model upwards and electric models, while it is available as an optional feature for models up to CX20D.

5 PREMIUM SERVICE SOLUTIONS

Benefit from high Service standards with CASE heavy and compact equipment dealers, backed up by Case Connect Center, wherever you operate around the world.

D SERIES MINI EXCAVATORS

KEY ADVANTAGES ON ALL MODELS

READY FOR ANY ATTACHMENT:
- Up to two AUX lines from CX12D to CX15EV;
- Up to three AUX lines from CX17D.





TILTABLE CAB
All maintenance points easily accessible.



ZERO-TAIL
- 90° arcs with minimal traffic disruption: closing of only 1 lane instead of 2 with conventional
- No damage when working closely to buildings, fences, …



ASSISTED LIFT 4.0
Both parts of the front window easily clip (1) and lift (2) together.
Hence the storage of the lower window isn't a problem anymore.
Available on all cab versions.



WORLD WIDEST 2-PIECE-BOOM OFFERING
WHY 2-PIECE-BOOM?
Get closer to the machine and lift up to 1.2 t more, depending on the model.
Reach up to 60 cm further.
Dumps up to 1.30 m higher.

MINI D SERIES

WORK ANYWHERE WITHOUT RESTRICTIONS

CX15EV, CX25EV

1 HIGH CAPACITY BATTERY

21,5 kWh (CX15EV) and 32,3 kWh (CX25EV) cobalt-free lithium-ion battery with 102 V nominal voltage.

2 FAST CHARGHING

The optional off-board fast charger, available both in IP21 and IP54* versions, recharges the battery on the jobsite quickly and easily. Both models can also be recharged overnight through a regular household power network.

*Charger IP54 available only via Parts.

3 LOW NOISE

The noise level of 75 dB internal (LpA) and 85 dB external (LwA) makes our eMHEX one of the most silent construction equipment in the industry.

SCAN OR CLICK QR TO WATCH THE FULL WALKAROUND



BEYOND EV! CX15EV, CX25EV ADVANCED FEATURES

- **Helicoidal Hydraulic Pump** for truly silent operations;
- **Bio oil and bio grease** are fitted as standard for a reduced risk of contamination in environmentally sensitive areas. Longer maintenance intervals than conventional. Excellent properties;
- You can **customize your boom, arm or bucket control** reactiveness to your preference or based on the specific task you perform;
- Your **cell phone** and **bottle** of water finally have dedicated holders;
- A large **power off button** is conveniently located on the right console.




DISPLAY

- **Digital color display** make navigation simple and intuitive;
- **3 power modes** enable to deliver extra power if needed or to work more efficiently.

MICRO SIZE
MAXI EASE

CX12D - CX14D - CX15EV

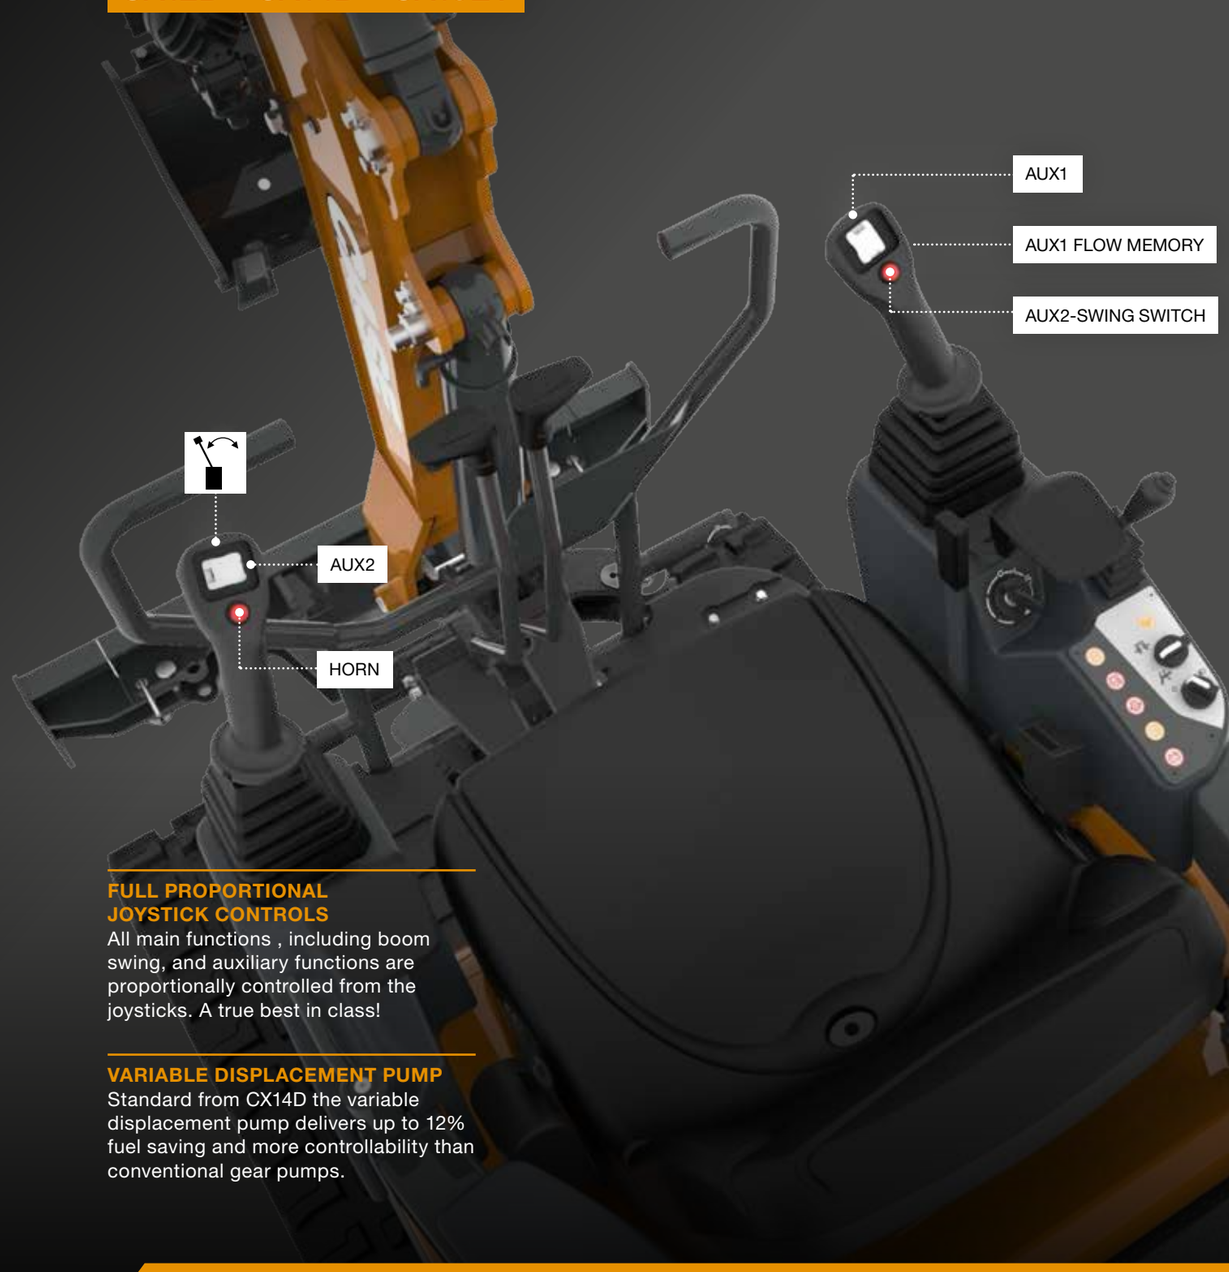


FULL PROPORTIONAL JOYSTICK CONTROLS
All main functions , including boom swing, and auxiliary functions are proportionally controlled from the joysticks. A true best in class!

VARIABLE DISPLACEMENT PUMP
Standard from CX14D the variable displacement pump delivers up to 12% fuel saving and more controllability than conventional gear pumps.




EASILY IN AND OUT
Another unique feature of CX12D, CX14D and CX15EV is the smart armrest opening that allows a unique ease to get in and out of the operating station.

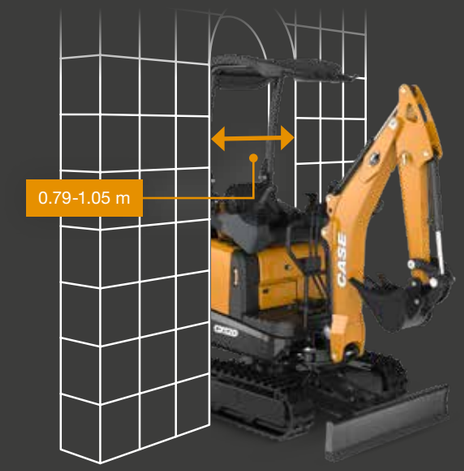

MINI DIMENSIONS
Tight dimensions and the easy-to-fold rollbar make CX12D/ CX14D/CX15EV the perfect machine for indoor applications.



EASY REFILL
- Refills incredibly easy. When the panel is closed the tank is well protected in the counterweight;
- Less downtime with superior tank capacity (+1working hour vs main brands).

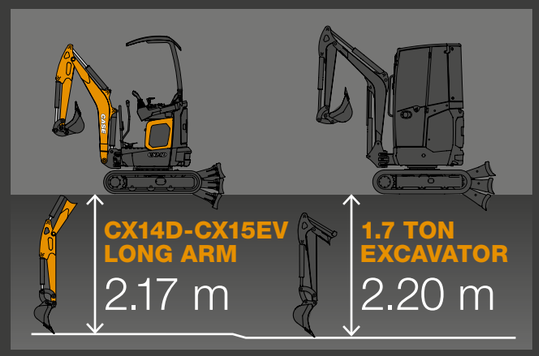

THE DIG DEPTH OF A 1,7 TONER
In conjunction with long arm CX14D and CX15EV offer superior dig depth and almost align to a 1,7t excavator.



NO CONSOLE, PLENTY OF LEG ROOM!
Mini excavators of this size usually feature a big console between operator's knees and feet, hence compromising comfort…
By moving all controls on the joystick we've created plenty of space for your legs!



RAINY DAY? HAPPY DAY!
Ease matters. We're proud to be the unique manufacturer offering on the marketplace with a roof option in this size class!

BEST SELLER

CX17D UP TO CX25D

SMOOTH & INTUITIVE TRAVEL

1st speed for high thrust or 2nd for more ground speed can be selected by a button on top of the blade lever

- **AUTO-SHIFT**: Automatically shifts from 2nd to 1st when the work pressure increases (e.g. When pushing with the blade), then automatically switches back to 2nd when done;
- **STRAIGHT TRAVEL**: In case of simultaneous use of boom/arm/swing/travel the hydraulic system simultaneously ensures fluid moves and straight travel.

EXTENDED WORKING RANGE WITH 2-PIECE BOOM MODELS

Available on CX20D, World most compact 2-piece boom mini excavator, It features half a meter more ground reach and +87 cm dump height vs CX19D. CX24D, the 2-piece boom twin of CX22D can be available through CASE Special Applications upon request.

MULCHER PROVISION

AUX3 grapple provision optional Mulcher provision, available from CX19D enables content power while the machine is travelling.



MINI DIGGER, MAXIMUM COMFORT

- Cell phone holder, bottle holder, gloves compartment;
- Proportional controls on the joystick*;
- AUX Flow memory button on the joystick;
- Great flat feet room, optimized with foldable pedal;
- AC option on CX22D, CX30D and bigger;
- DAB radio option with bluetooth connection;
- Flat floor and max feet space with foldable travel pedals.

*except CX17D, CX18D with pedal controls



EASY REFILL 4.0

- Easier and cleaner refills;
- Superior tank size, up to 2 extra working hours vs other brands;
- Visual and immediate filters check at every diesel refill.



SELF SUPPORTING CANOPY

Only 2 Lifting Points on canopy version on CX17D, CX18D, CX19D and CX20D.



EASY ARMREST ADJUSTMENT

Simply rotate and pull the knob to adjust armrest height. No tool needed.

TOP COMFORT MAXIMUM PRODUCTIVITY

CX30D UP TO CX38D

SMOOTH & INTUITIVE TRAVEL

1st speed for high thrust or 2nd for more ground speed can be selected by a button on top of the blade lever

- **AUTO-SHIFT**: Automatically shifts from 2nd to 1st when the work pressure increases (e.g. When pushing with the blade), then automatically switches back to 2nd when done;
- **STRAIGHT TRAVEL**: In case of simultaneous use of boom/arm/swing/travel the hydraulic system simultaneously ensures fluid moves and straight travel.

AIR CONDITONING OPTION AVAILABLE FOR GREAT OPERATOR COMFORT

All components are located in the upper rear spoiler, a D-Series familiar and stylish solution, which grants zero-tail swing also on the vertical axis, and better visibility.

ANTI-THEFT SMART KEY OPTION

Protect your investment with this optional feature.



DAY-TO-DAY FRIENDLY

Bottle-holder, Cell-phone holder, Document storage.



ELECTRO-PROPORTIONAL AUX1 FLOW CONTROL AND ENGINE RPM CONTROL WITH AUTO-IDLE

Features normally available only on bigger size models equipped with electronic engine.



EASY REFILL

- Easier and cleaner refills;
- Superior tank size, up to 2 extra working hours vs other brands;
- Visual and immediate filters check at every diesel refill.



6-WAY BLADE OPTION

Makes your mini even more versatile. Available from CX38D.

MINI D SERIES

HEAVY EXCAVATORS SOLUTIONS

CX42D UP TO CX65D



ADVANCED OPERATOR COMPARTMENT
Advanced and stout operator interface that includes the technology of a modern heavy excavator in a small package.
Keep calm & Enjoy!

EXTENDED WORKING RANGE WITH 2-PIECE BOOM MODELS
Available on CX45D, CX55D and CX65D provides extended working range:
- Around +60 cm of ground reach;
- Around +1,20 m of dump height.


SMART & COMFORTABLE ENVIRONMENT
Premium suspension seat for all-day comfort.
Intuitive operation with 7-inch color display, jog shuttle and quick navigation buttons.
Standard rear-view system for enhanced visibility and safer working.
Stay comfortable. Stay in control. Keep productivity high.



PROPORTIONAL ENGINE RPM CONTROL WITH AUTO-IDLE
Standard.



REVERSIBLE FAN KEEPS YOUR MINI PROTECTED
A standard feature that prevents dust buildup on the radiators and ensures more efficient cooling of the machine's main components.

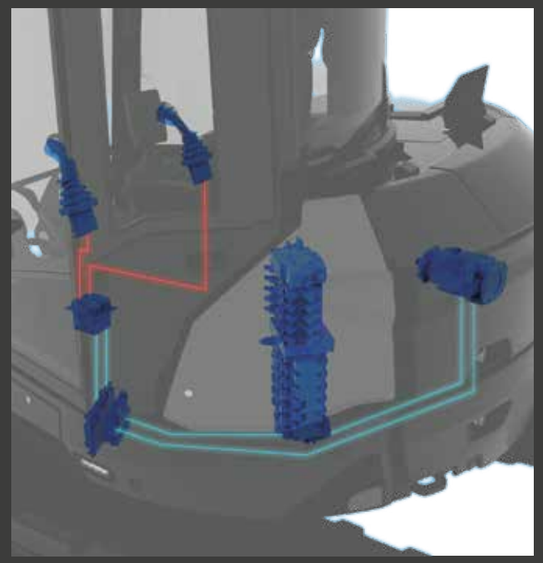

E.O.C. WORLD MOST ADVANCED HYDRAULICS SYSTEM
Electronic Open Center (E.O.C.) cuts fuel usage and boosts productivity and controllability, including on AUX lines. Standard from CX60D.



FUEL PUMP
Fast, simple, clean. Standard from CX60D.

MINI D SERIES

SPECIAL APPLICATIONS

SKY IS THE LIMIT!

1 UNIQUE 2-PIECE BOOM DESIGN

Extends working range, reducing the need for machine repositioning;

Enhances lift capacity by allowing loads to be lifted vertically, closer to the cab.

2 OUTSTANDING SERVICE ACCESSIBILITY

Tiltable cab for easy access to internal components;

Smart fuel tank integrated into the rear door Enables cleaner refueling and easier daily filter checks.

3 NARROWEST MODEL IN THE 2.5-TON CLASS: 0.99 m - 1.30 m

Short radius design combined with a retractable undercarriage

Transport possible on a car trailer with B-type driver license with selected trailers and attachments

Ideal for work in confined or urban spaces, easy to transport

4 XXL CAB & OPERATOR COMFORT

55 cm wide door and spacious cab with optional air conditioning;

Assisted lift and storage of both parts of the front window especially useful when A/C is not selected.**More operating comfort, every day**;

Smooth, precise operation with Load Sensing and Flow Sharing hydraulic system;

Proportional control of attachments and boom swing directly from the joystick;

Up to 3 auxiliary hydraulic functions available;

Additional pump and work mode for mulching operations available;

Enables an easy and productive use of any multifunction attachment.



MAINTAIN TOP PERFORMANCE,

OUTSTANDING AFTER SALES SERVICES

Keep your equipment performing at its best and protect your investment's value with the extensive offering of high-quality CASE Parts.

Genuine Parts *HIGH PERFORMANCE*
Optimize your performance and add value to your machine with high-quality genuine parts.

Attachments. *BUSINESS SOLUTIONS*
Add versatility to performance with CASE attachments designed for CASE machines and tested by CASE engineers.

FLEETPRO
Ensure your machine's performance beyond warranty and manage your budget with CASE's quality second-line range of parts.

Reman.Parts *REMANUFACTURED*
Choose sustainable quality with remanufactured parts designed for CASE equipment of all ages.

CASE CONSTRUCTION | ServiceSolutions

Enjoy the peace of mind of knowing CASE Service Solutions will keep your equipment in top condition with maximum uptime, no unexpected costs, and help you optimize your profitability.

CASE CARE
Maximize your machine's uptime and efficiency with this planned maintenance program.

CASE PROTECT
Avoid unexpected costs with this extended warranty program.

CASE FLUID ANALYSIS
Ensure your machine's uptime with detailed fluid reporting.

myCASEConstruction
Puts the power of centralized fleet management in your hands - through a single, easy-to-use portal and mobile app.

CASE SITECONNECT
Connects your Dealer to your machine for remote support.

SPEC SHEET

SPECIFICATIONS		CX12D	CX14D	CX15EV	CX17D	CX18D	CX19D	CX20D	CX22D	CX24D	CX25EV	CX25D	CX30D	CX35D	CX38D	CX42D	CX45D	CX50D	CX55D	CX58D	CX60D	CX65D
ENGINE																						
Type		KUBOTA D722 STAGE 5	KUBOTA D722 STAGE 5	-	YANMAR 3TNV70 STAGE 5	YANMAR 3TNV70 STAGE 5	YANMAR 3TNV76 STAGE 5	YANMAR 3TNV76 STAGE 5	KUBOTA D1105 STAGE 5	KUBOTA D1105 STAGE 5	-	YANMAR 3TNV76 STAGE 5	KUBOTA D1703-M STAGE 5	KUBOTA D1703-M STAGE 5	KUBOTA D1703-M STAGE 5	KUBOTA D1803-CR-T STAGE 5	KUBOTA D1803-CR-T STAGE 5	KUBOTA V2403-CR-T STAGE V	KUBOTA V2403-CR-T STAGE V	KUBOTA V2607-CR-T STAGE 5	KUBOTA V2607-CR-T STAGE 5	KUBOTA V2607-CR-T STAGE 5
Max. Power	rpm	2200	2200	-	2200	2200	2200	2200	2400	2400	-	2200	2200	2200	2200	2300	2300	2300	2300	2300	2300	2200
	kW/hp	8.8 - 11.8	8.8 - 11.8	-	12 - 16.1	12 - 16.1	13.7 - 18.4	13.7 - 18.4	15.4 - 20.7	15.4 - 20.7	-	13.7 - 18.4	18.2 - 24.4	18.2 - 24.4	18.2 - 24.4	32.3 - 43.3	32.3 - 43.3	42.6 - 57.1	42.6 - 57.1	44.3 - 59.4	44.3 - 59.4	44.3 - 59.4
Displacement	cm^3	719	719	-	854	854	1116	1116	1105	1105	-	1116	1647	1647	1647	1826	1826	2434	2434	2615	2615	2615
Number of cylinders	n°	3	3	-	3	3	3	3	3	3	-	3	3	3	3	3	3	4	4	4	4	4
Cooling		Liquid	Liquid	-	Liquid	Liquid	Liquid	Liquid	Liquid	Liquid	-	Liquid	Liquid	Liquid	Liquid	Liquid	Liquid	Liquid	Liquid	Liquid	Liquid	Liquid
Consumption	l/h	1.8	1.8	-	2.4	2.4	3.1	3.1	3	3	-	3	3.5	3.5	3.5	5.4	5.4	6.9	6.9	7.6	7.6	7.6
Alternator	V (Ah)	12 (40)	12 (40)	-	12 (40)	12 (40)	12 (40)	12 (40)	12 (40)	12 (40)	-	12 (40)	12 (40)	12 (40)	12 (40)	12 (70)	12 (70)	12 (70)	12 (70)	12 (60)	12 (60)	12 (60)
Battery	V (Ah)	12 (45)	12 (45)	-	12 (65)	12 (65)	12 (65)	12 (65)	12 (62)	12 (62)	-	12 (65)	12 (80)	12 (80)	12 (80)	12 (74)	12 (74)	12 (100)	12 (100)	12 (95)	12 (95)	12 (95)
ELECTRICAL MOTOR																						
Type		-	-	IPM*	-	-	-	-	-	-	IPM*	-	-	-	-	-	-	-	-	-	-	-
Electrical motor power	kW/hp	-	-	11.0 / 14.7	-	-	-	-	-	-	25.0 / 33.5	-	-	-	-	-	-	-	-	-	-	-
Peak electrical motor power	kW	-	-	16.0	-	-	-	-	-	-	32.0	-	-	-	-	-	-	-	-	-	-	-
Supply		-	-	Three-phase alternating current	-	-	-	-	-	-	Three-phase alternating current	-	-	-	-	-	-	-	-	-	-	-
SUPPLY																						
Battery chemistry		-	-	Lithium-ion	-	-	-	-	-	-	Lithium-ion	-	-	-	-	-	-	-	-	-	-	-
Gross capacity	kWh	-	-	21.5	-	-	-	-	-	-	32.3	-	-	-	-	-	-	-	-	-	-	-
Nominal voltage of the system	V	-	-	102	-	-	-	-	-	-	102	-	-	-	-	-	-	-	-	-	-	-
Autonomy according to the operating mode	h	-	-	4 ÷ 8	-	-	-	-	-	-	4 ÷ 8	-	-	-	-	-	-	-	-	-	-	-
CHARGING TIMES																						
On-board charger 220V	h	-	-	10	-	-	-	-	-	-	9	-	-	-	-	-	-	-	-	-	-	-
External three-phase rapid charge 380V (Optional)	h	-	-	1.0 (80%) 1.5 (100%)	-	-	-	-	-	-	1.5 (80%) 2.0 (100%)	-	-	-	-	-	-	-	-	-	-	-
OPERATING MODES																						
ECO Max.	rpm	-	-	2400	-	-	-	-	-	-	2000	-	-	-	-	-	-	-	-	-	-	-
STD Max.	rpm	-	-	2600	-	-	-	-	-	-	2400	-	-	-	-	-	-	-	-	-	-	-
PWR Max.	rpm	-	-	2800	-	-	-	-	-	-	2600	-	-	-	-	-	-	-	-	-	-	-
WEIGHT																						
Transport weight																						
- Roll-bar / Canopy*	t	1.20	1.25	1.31	1.58	1.72	1.77	1.90	2.09	-	2.21	2.45	2.98	-	-	-	-	-	-	-	-	-
- Cab*	t	-	-	-	1.69	1.83	1.88	2.01	2.19	2.4	2.34	2.58	3.11	3.33	3.76	4.20	4.60	4.80	5.25	5.44	5.74	6.29
Operating weight																						
- Roll-bar / Canopy ISO 6016*	t	1.30	1.36	1.39	1.69	1.83	1.88	2.01	2.22	2.43	2.34	2.58	3.11	-	-	-	-	-	-	-	-	-
- Cab ISO 6016*	t	-	-	-	1.80	1.94	1.99	2.12	2.32	2.53	2.47	2.71	3.24	3.48	3.91	4.35	4.75	4.95	5.40	5.67	5.97	6.52
* with rubber tracks																						
KEY DIMENSIONS																						
Overall																						
- Width	mm	790 - 1050	790 - 1050	790 - 1050	990 - 1250	990 - 1300	990 - 1300	990 - 1300	990 - 1300	990 - 1300	990 - 1300	1500	1550	1580	1700	1750	1750	1900	1900	1980	1980	1980
- Height	mm	2300	2300	2300	2370	2370	2370	2370	2395	2395	2420	2530	2520	2520	2520	2510	2510	2570	2570	2620	2700	2700
- Length	mm	3102	3172	3172	3353	3500	3500	3520	3743	3828	3748	4219	4380	4538	4538	4880	4980	5130	5130	5410	5640	5740
Tracks width	mm	180	180	180	230	230	230	230	230	230	230	280	280	300	300	350	350	400	400	400	400	400

* IPM = Internal Permanent Magnets

SPEC SHEET

SPECIFICATIONS		CX12D	CX14D	CX15EV	CX17D CX18D	CX19D CX20D	CX22D	CX24D	CX25EV	CX25D	CX30D CX35D	CX38D	CX42D CX45D	CX50D CX55D	CX58D	CX60D CX65D
HYDRAULIC SYSTEM																
Circuit Type		Open Center	Open Center	Open Center	Open Center	Open Center	Load Sensing closed center system with "Flow Sharing" control valve	Load Sensing closed center system with "Flow Sharing" control valve	Load Sensing Flow Sharing	Load Sensing centre closed with "Flow Sharing" distributor	Load Sensing closed center system with "Flow Sharing" control valve	Load Sensing closed center system with "Flow Sharing" control valve	Load Sensing closed center system with "Flow Sharing" control valve	Load Sensing closed center system with "Flow Sharing" control valve	Load Sensing closed center system with "Flow Sharing" control valve	Load Sensing closed center system with "Flow Sharing" control valve
Pump type		n° 2 gear pumps	Variable flow	1 Low Noise Helical Gear Pump	Variable flow	Variable flow	1 LS variable pump + 1 gear pump	1 LS variable pump + 1 gear pump	1 LS Variable pump	1 Load Sensing pump with variable displacement	1 LS variable pump	1 LS variable pump	1 LS hydraulic variable pump with electronic control + 1 gear pump	1 LS hydraulic variable pump with electronic control + 1 gear pump	1 LS hydraulic variable pump with electronic control + 1 gear pump	1 LS hydraulic variable pump with electronic control + 1 gear pump
Pump displacement	cm^3	5.6 + 5.6	6.0 + 6.0	10.1	8 + 8 + 6.6	9 + 9 + 6.6	25 + 5	25 + 5	18	25	48	48	53.7 + 11.2	65 + 14.5	65 + 14.5	65 + 14.5
Pump capacity	l/min	12 + 12	13 + 13	26	16 + 16 + 13.1	18 + 18 + 13.1	48 + 9.5	48 + 9.5	46	50	101	101	107 + 22.3	129 + 28.8	129 + 28.8	129 + 28.8
Max. circuit calibration pressure	bar	170	190	180	220	240	240	240	210	250	260	260	280	280	280	280
AUX 1																
- Max Flow	lpm	26	28	28	29	31	50	50	40	50	40 (50 max setting)	40 (50 max setting)	50 (70 max setting)	60 (70 max setting)	70 (80 max setting)	85
- Max Pressure	bar	165	200	180	205	205	200	200	210	200/250	200/250	200/250	200/280	200/280	200/280	200
AUX 1 Constant Flow (optional, additional pump dedicated to AUX1)																
- Max Flow	lpm	-	-	-	-	19	18	18	-	19	31	31	48	53	60	60
- Max Pressure	bar	-	-	-	-	180	180	180	-	180	180	180	180	180	180	180
AUX 2																
- Max **Flow**	lpm	12	13	10/7	13	13	13/8	13/8	13/9	12/8	32/20	32/20	60/43	60/43	45/39	65/90
- Max Pressure	bar	165	165	180	205	205	220	220	210	250	190 (250 max setting)	190 (250 max setting)	280	280	280	280
AUX 3 circuit																
- Max Flow	lpm	-	-	-	-	-	-	-	-	-	32/20	32/20	40/32	40/32	-	45
- Max Pressure	bar	-	-	-	-	-	-	-	-	-	190 (250 max setting)	190 (250 max setting)	280	280	-	280
AUX 3 grapple provision (derived from bucket tilt function)																
- Max Flow	lpm	-	-	-	16	18	50	50	28/24	29/22	54/33	54/33	73/51	73/51	78/58	90/75
- Max Pressure	bar	-	-	-	220	240	220	220	210	250	260	260	280	280	280	280
SPEED																
Travel speed (2-speed autoshifting)	km/h	1^{st} : 1.8 2^{nd} : 3.8	1^{st} : 1.8 2^{nd} : 3.8	1^{st} : 1.8 2^{nd} : 3.8	1^{st} : 2.2 2^{nd} : 4.1	1^{st} : 2.3 2^{nd} : 4.4	1^{st} : 2.6 2^{nd} : 4.0	1^{st} : 2.6 2^{nd} : 4.0	1^{st} : 2.3 2^{nd} : 4.0	1^{st} : 2.6 2^{nd} : 4.3	1^{st} : 2.7 2^{nd} : 4.3	1^{st} : 2.7 2^{nd} : 4.3	1^{st} : 2.6 2^{nd} : 4.5	1^{st} : 2.6 2^{nd} : 4.5	1^{st} : 2.6 2^{nd} : 4.5	1^{st} : 2.3 2^{nd} : 4.5
Slew speed	rpm	11	11	9.5	10.5	10.5	10.5	10.5	10	10	10.5	9.5	10.5	10.5	10.5	11
FLUIDS CAPACITIES																
Fuel tank	l	14.5	14.5	-	25	25	20	20	-	26	49	49	60	60	75	85
Hydraulic oil	l	9.5	9.5	9.5	20	20	16	16	-	29	33.5	33.5	50	50	65	CX60D - 65 CX65D - 60
Hydraulic circuit	l	15	15	15	29	29	25	25	-	40	54	54	65	65	85	80
Cooling system	l	4.3	4.3	-	4.5	4.5	4	4	-	5	7.5	8	9	9	11	12
Engine oil	l	3.8	3.8	-	2.4	2.8	4.4	4.4	-	2.8	6.3	6.3	7	7	9.5	10.2

ATTACHMENTS



QUICK COUPLERS



WOOD GRAPPLES



DEMOLITION BREAKERS



AUGERS



ROCK BUCKETS



DITCH CLEANING BUCKETS




MULCHERS




SORTING GRAPPLES


CX12D

Standard arm (Long arm)

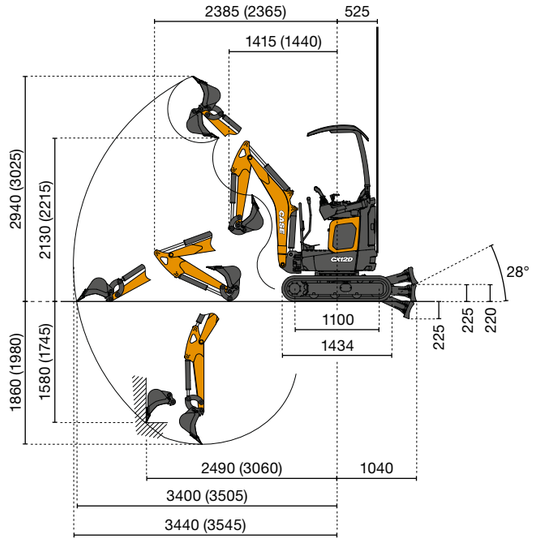

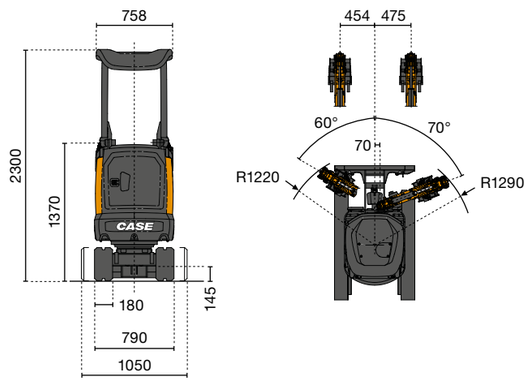

Opening arm from the rotation's center (m).
Lifting capacity (ton) at 1.0 m height.
Standard counterweight.




Standard dipper stick L = 900 mm


LIFTING CAPACITY	2	Max
Frontal and lifted dozer blade	0.29*	0.16
Lateral, open undercarriage	0.24	0.13

* Indicates the hydraulic load limit.


CX14D - CX15EV

Standard arm (Long arm)

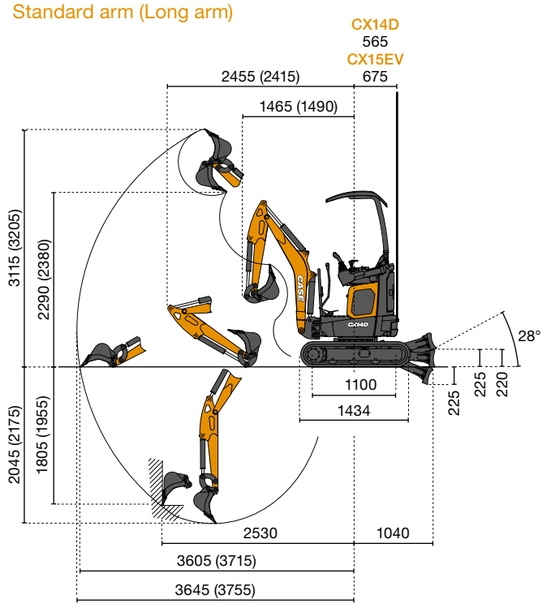

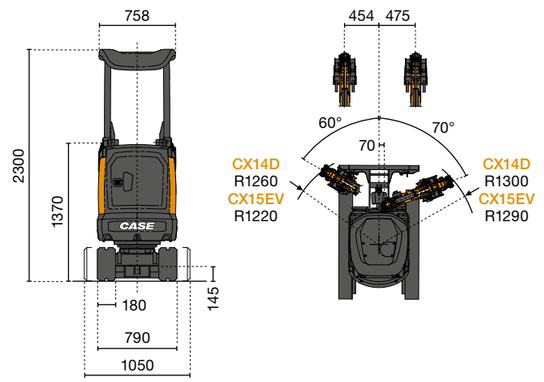

Opening arm from the rotation's center (m).
Lifting capacity (ton) at 1.0 m height.
Standard counterweight.



Standard dipper stick L = 900 mm

CX14D

LIFTING CAPACITY	2	3	Max
Frontal and lifted dozer blade	0.31*	0.18	0.17
Lateral, open undercarriage	0.27	0.14	0.13


CX15EV


LIFTING CAPACITY	2	3	Max
Frontal and lifted dozer blade	0.35*	0.18	0.17
Lateral, open undercarriage	0.23	0.12	0.11

* Indicates the hydraulic load limit.


CX17D

Standard arm (Long arm)

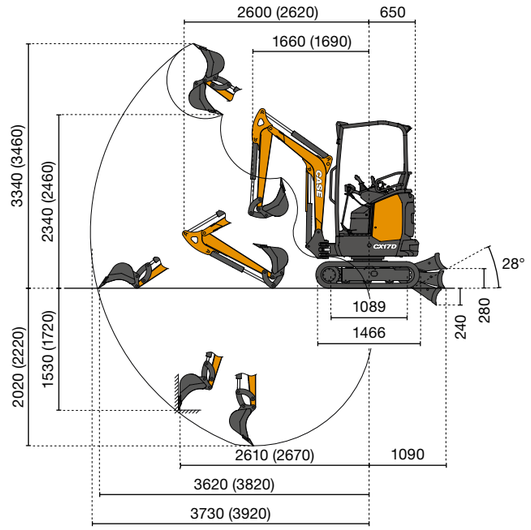

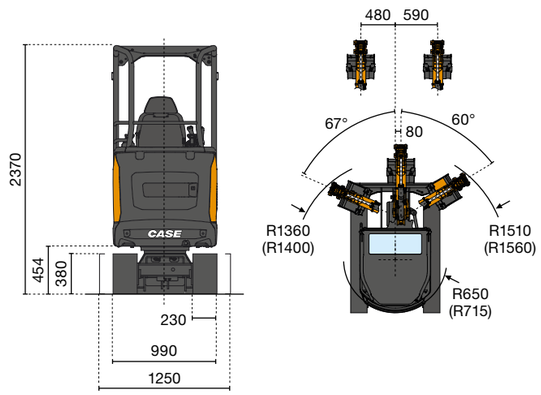

Opening arm from the rotation's center (m).
Lifting capacity (ton) at 1.0 m height.
Standard counterweight.




Standard dipper stick L = 950 mm


LIFTING CAPACITY	2	3	Max
Frontal and lifted dozer blade	0.30	0.16	0.14
Lateral, open undercarriage	0.34	0.18	0.16

* Indicates the hydraulic load limit.


CX18D

Standard arm (Long arm)

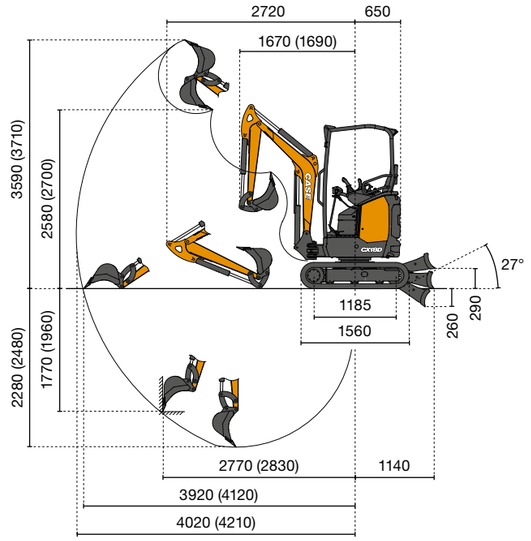

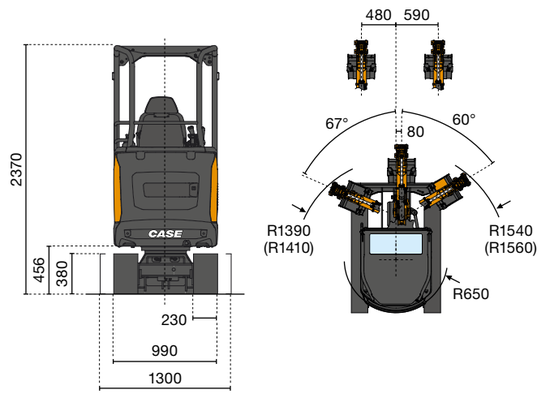

Opening arm from the rotation's center (m).
Lifting capacity (ton) at 1.0 m height.
Standard counterweight.



Standard dipper stick L = 1150 mm

LIFTING CAPACITY	2	3	Max
Frontal and lifted dozer blade	0.42	0.23	0.18
Lateral, open undercarriage	0.42	0.23	0.18


* Indicates the hydraulic load limit.

The lifting capacity is based on the ISO 10567 and it does not exceed more than the 75% of static tipping load or more than the 87% of the hydraulic lifting capacity of the machine.


The lifting capacity is based on the ISO 10567 and it does not exceed more than the 75% of static tipping load or more than the 87% of the hydraulic lifting capacity of the machine.

CX19D

Standard arm (Long arm)

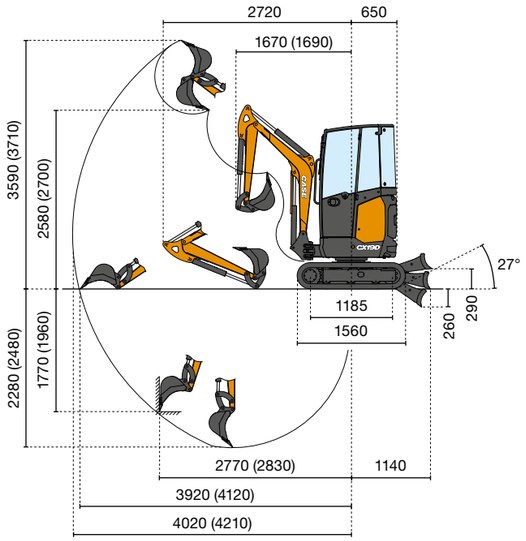

Opening arm from the rotation's center (m)
Lifting capacity (ton) at 1.0 m height.
Standard counterweight.




Standard dipper stick L = 1150 mm

LIFTING CAPACITY	2	3	Max
Frontal and lifted dozer blade	0.43	0.23	0.18
Lateral, open undercarriage	0.43	0.23	0.19


* Indicates the hydraulic load limit.

CX20D

Standard arm (Long arm)

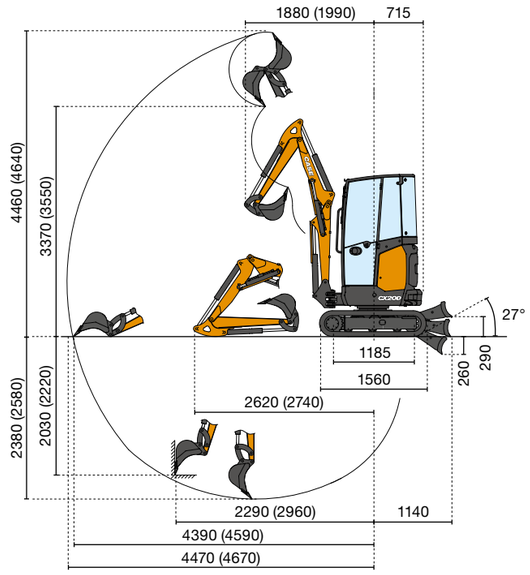

Opening arm from the rotation's center (m)
Lifting capacity (ton) at 1.0 m height.
Standard counterweight.




Standard dipper stick L = 1150 mm

LIFTING CAPACITY	2	3	Max
Frontal and lifted dozer blade	0.49	0.25	0.16
Lateral, open undercarriage	0.47	0.25	0.16


* Indicates the hydraulic load limit.

CX22D

Standard arm (Long arm)

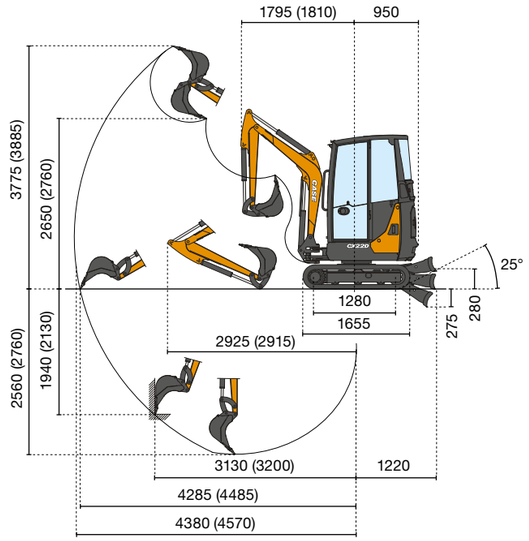

Opening arm from the rotation's center (m)
Lifting capacity (ton) at 1.0 m height.
Standard counterweight.




Standard dipper stick L = 1250 mm

LIFTING CAPACITY	2	3	Max
Frontal and lowered dozer blade	0.75*	0.47*	0.40*
Frontal and lifted dozer blade	0.75*	0.41	0.29
Lateral, open undercarriage	0.62	0.35	0.24


* Indicates the hydraulic load limit.

CX24D

Standard arm (Long arm)

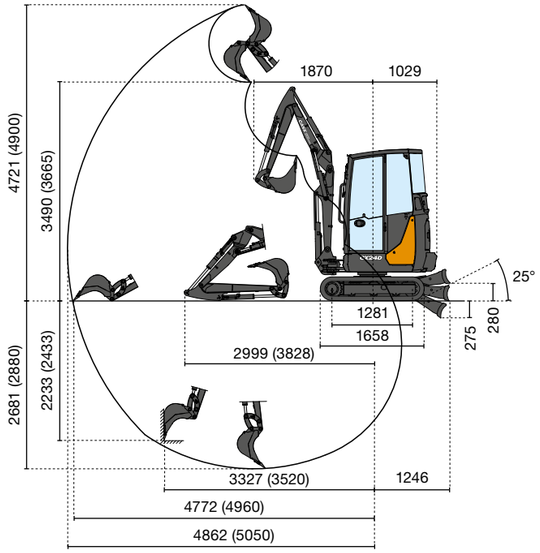

Opening arm from the rotation's center (m)
Lifting capacity (ton) at ground level.
Standard counterweight.



Standard dipper stick

LIFTING CAPACITY	1	2	3	Max
Frontal and lowered dozer blade	1.7	1.5	0.6	0.4
Frontal and lifted dozer blade	1.2	0.7	0.4	0.3
Lateral, open undercarriage	1.0	0.6	0.4	0.2


* Indicates the hydraulic load limit.


The lifting capacity is based on the ISO 10567 and it does not exceed more than the 75% of static tipping load or more than the 87% of the hydraulic lifting capacity of the machine.

The lifting capacity is based on the ISO 10567 and it does not exceed more than the 75% of static tipping load or more than the 87% of the hydraulic lifting capacity of the machine.


CX25EV

Standard arm (Long arm)

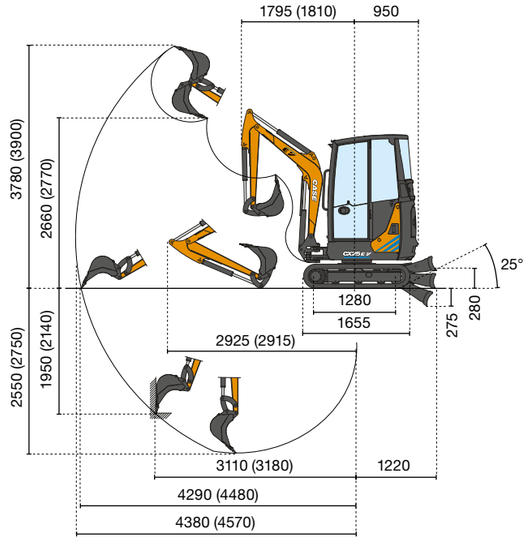

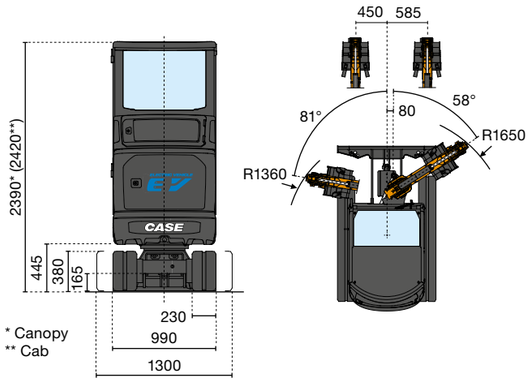

Opening arm from the rotation's center (m)
Lifting capacity (ton) at 1.0 m height.
Standard counterweight.




Standard dipper stick L = 1250 mm


LIFTING CAPACITY	2	3	Max
Frontal and lowered dozer blade	0.74*	0.47*	0.40*
Frontal and lifted dozer blade	0.74*	0.46	0.33
Lateral, open undercarriage	0.69	0.39	0.28

* Indicates the hydraulic load limit.


CX25D

Standard arm (Long arm)

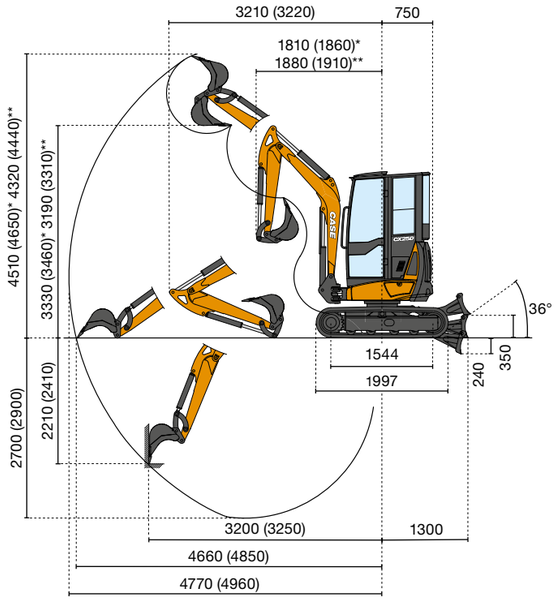

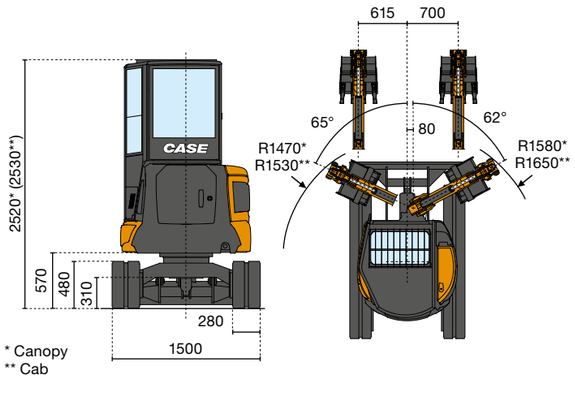

Opening arm from the rotation's center (m)
Lifting capacity (ton) at 1.0 m height.
Standard counterweight.




Standard dipper stick L = 1350 mm


LIFTING CAPACITY	2	3	4	Max
Frontal and lowered dozer blade	0.99*	0.64	0.49*	0.45*
Frontal and lifted dozer blade	0.93	0.50	0.32	0.29
Lateral	0.78	0.44	0.29	0.26

* Indicates the hydraulic load limit.


CX30D

Standard arm (Long arm)

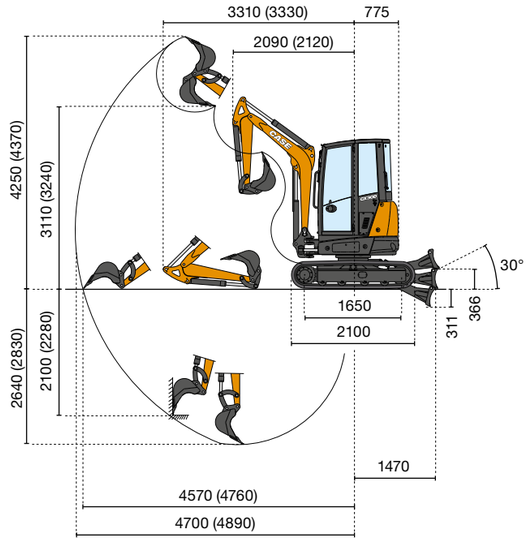

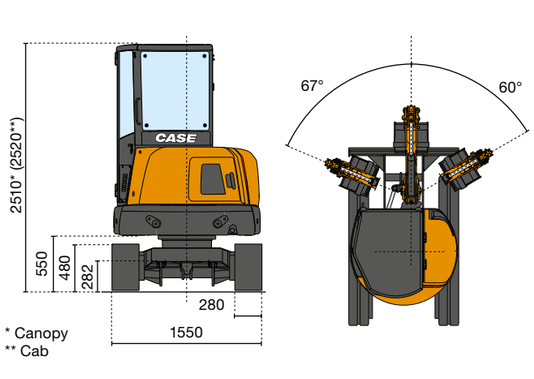

Opening arm from the rotation's center (m)
Lifting capacity (ton) at 1.0 m height.
Standard counterweight.




Standard dipper stick L = 1200 mm


LIFTING CAPACITY	3	4	Max
Frontal and lowered dozer blade	1.10*	0.85*	0.84*
Frontal and lifted dozer blade	0.64	0.41	0.40
Lateral	0.50	0.33	0.32

* Indicates the hydraulic load limit.


CX35D

Standard arm (Long arm)

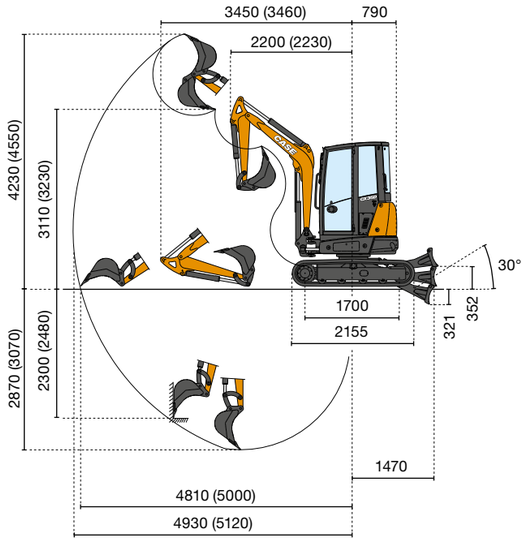

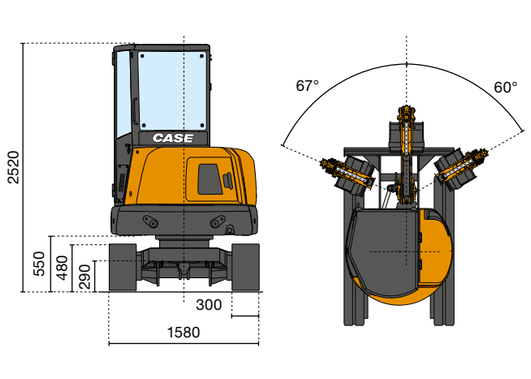

Opening arm from the rotation's center (m)
Lifting capacity (ton) at 1.0 m height.
Standard counterweight.



Standard dipper stick L = 1200 mm

LIFTING CAPACITY	3	4	Max
Frontal and lowered dozer blade	1.09*	0.82*	0.79*
Frontal and lifted dozer blade	0.73	0.47	0.44
Lateral	0.57	0.37	0.35


* Indicates the hydraulic load limit.


The lifting capacity is based on the ISO 10567 and it does not exceed more than the 75% of static tipping load or more than the 87% of the hydraulic lifting capacity of the machine.

The lifting capacity is based on the ISO 10567 and it does not exceed more than the 75% of static tipping load or more than the 87% of the hydraulic lifting capacity of the machine.


CX38D

Standard arm (Long arm)

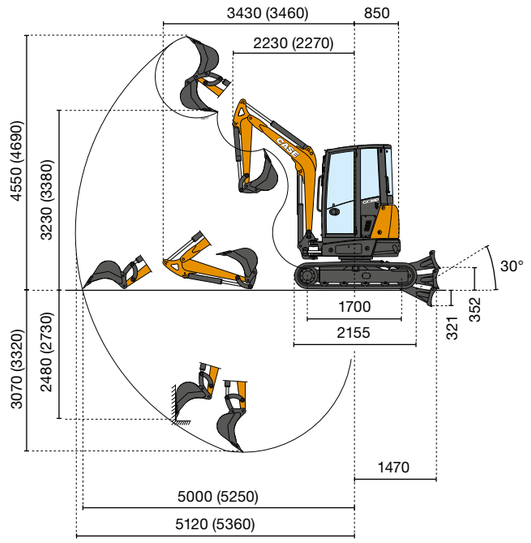

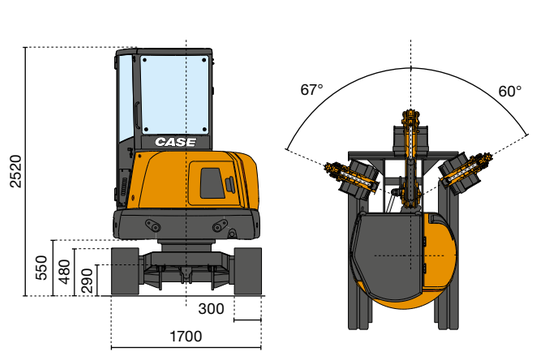

Opening arm from the rotation's center (m).
Lifting capacity (ton) at 1.0 m height.
Standard counterweight.




Standard dipper stick L = 1400 mm


LIFTING CAPACITY	3	4	Max
Frontal and lowered dozer blade	1.17*	0.90*	0.85*
Frontal and lifted dozer blade	0.88	0.57	0.50
Lateral	0.79	0.52	0.45

* Indicates the hydraulic load limit.


CX42D

Standard arm (Long arm)

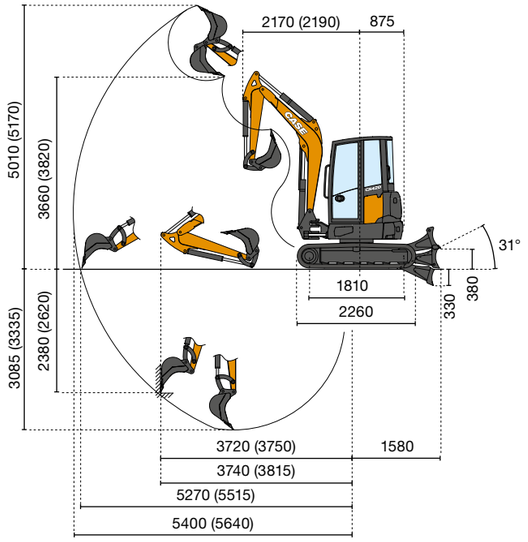

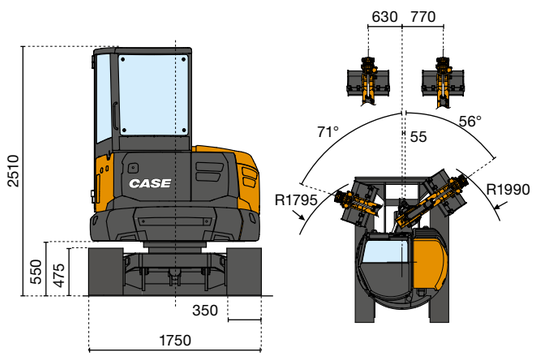

Opening arm from the rotation's center (m).
Lifting capacity (ton) at 1.0 m height.
Standard counterweight.




Standard dipper stick L = 1400 mm


LIFTING CAPACITY	3	4	Max
Frontal and lowered dozer blade	1.69*	1.20*	1.07*
Frontal and lifted dozer blade	1.00	0.66	0.52
Lateral	0.79	0.48	0.38

* Indicates the hydraulic load limit.


CX45D

Standard arm (Long arm)

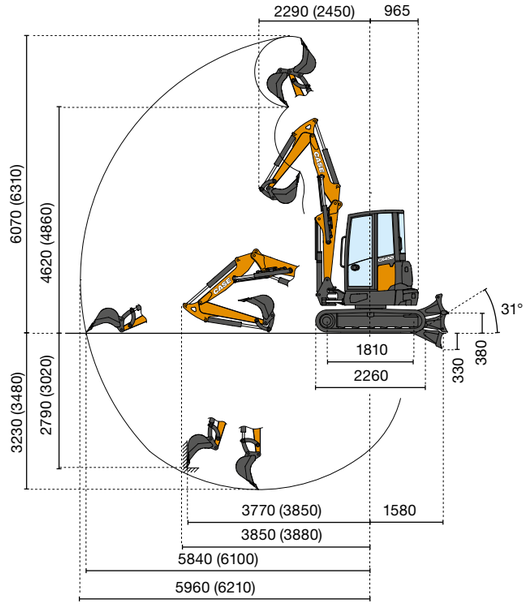

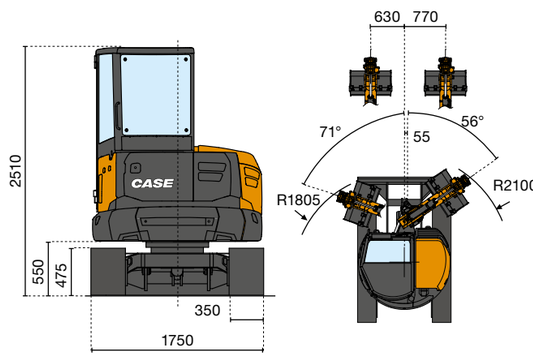

Opening arm from the rotation's center (m).
Lifting capacity (ton) at 1.0 m height.
Standard counterweight.




Standard dipper stick L = 1400 mm


LIFTING CAPACITY	2	3	4	5	Max
Frontal and lowered dozer blade	2.32*	1.22*	1.08*	0.97*	0.89*
Frontal and lifted dozer blade	2.32	1.21	0.76	0.52	0.48
Lateral	1.57	0.87	0.55	0.37	0.34

* Indicates the hydraulic load limit.


CX50D

Standard arm (Long arm)

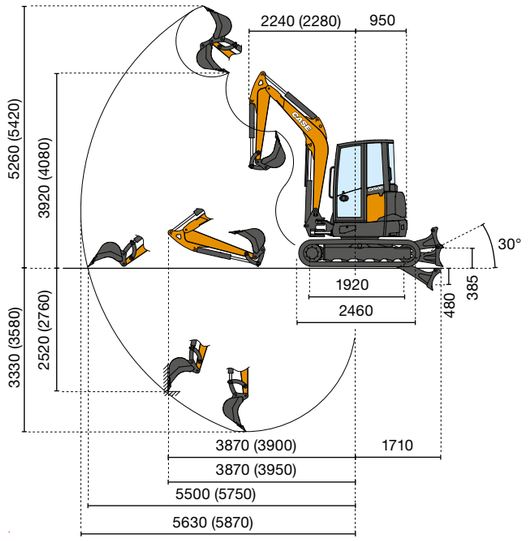

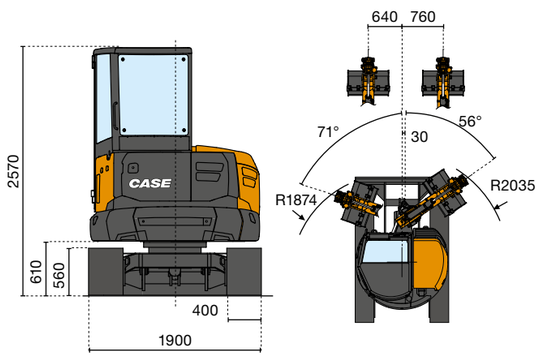

Opening arm from the rotation's center (m).
Lifting capacity (ton) at 1.0 m height.
Standard counterweight.



Standard dipper stick L = 1500 mm

LIFTING CAPACITY	3	4	Max
Frontal and lowered dozer blade	1.91*	1.33*	1.13*
Frontal and lifted dozer blade	1.25	0.82	0.61
Lateral	0.92	0.62	0.46


* Indicates the hydraulic load limit.


The lifting capacity is based on the ISO 10567 and it does not exceed more than the 75% of static tipping load or more than the 87% of the hydraulic lifting capacity of the machine.

The lifting capacity is based on the ISO 10567 and it does not exceed more than the 75% of static tipping load or more than the 87% of the hydraulic lifting capacity of the machine.


CX55D

Standard arm (Long arm)

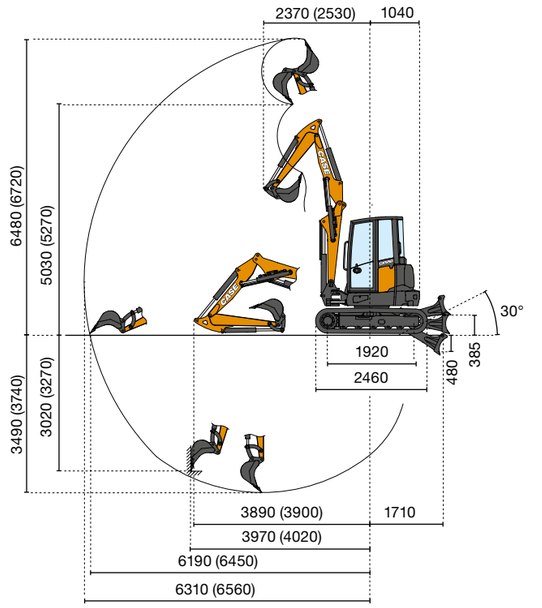

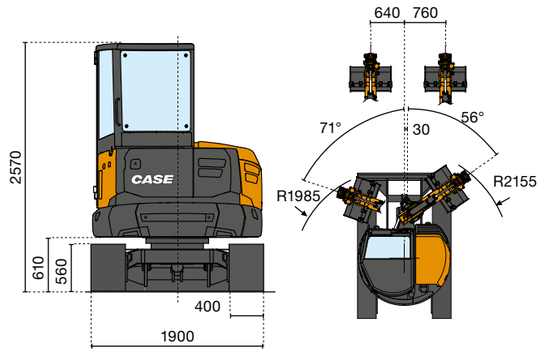

Opening arm from the rotation's center (m).
Lifting capacity (ton) at 1.0 m height.
Standard counterweight.




Standard dipper stick L = 1500 mm


LIFTING CAPACITY	2	3	4	5	Max
Frontal and lowered dozer blade	3.19*	1.60*	1.29*	1.19*	1.01*
Frontal and lifted dozer blade	2.86	1.45	0.92	0.62	0.51
Lateral	1.95	1.07	0.69	0.46	0.38

* Indicates the hydraulic load limit.


CX58D

Standard arm (Long arm)

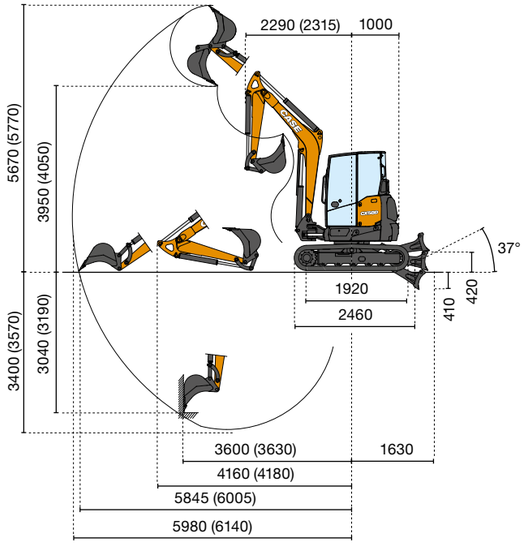

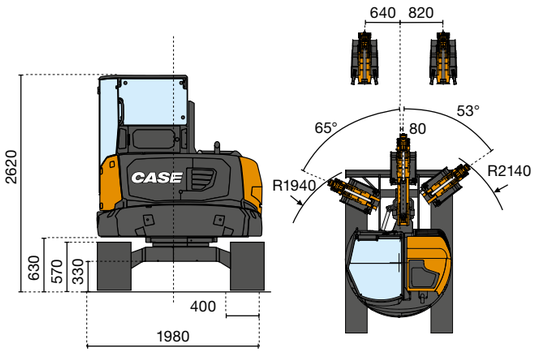

Opening arm from the rotation's center (m).
Lifting capacity (ton) at 1.0 m height.
Standard counterweight.




Standard dipper stick L = 1500 mm


LIFTING CAPACITY	3	4	5	Max
Frontal and lowered dozer blade	2.73*	1.81*	1.42*	1.38*
Frontal and lifted dozer blade	1.49	0.97	0.70	0.67
Lateral	1.29	0.85	0.61	0.59

* Indicates the hydraulic load limit.


CX60D

Standard arm (Long arm)

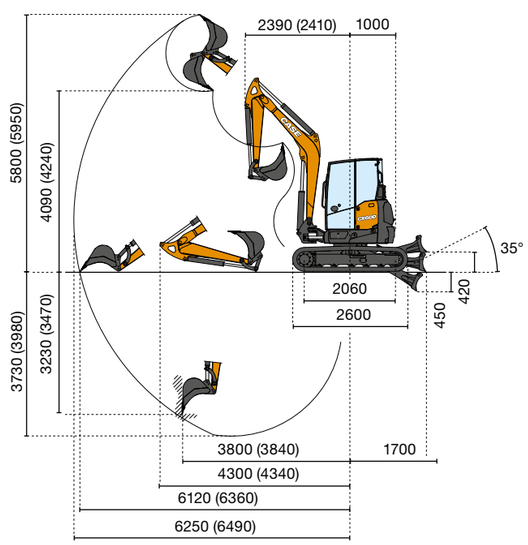

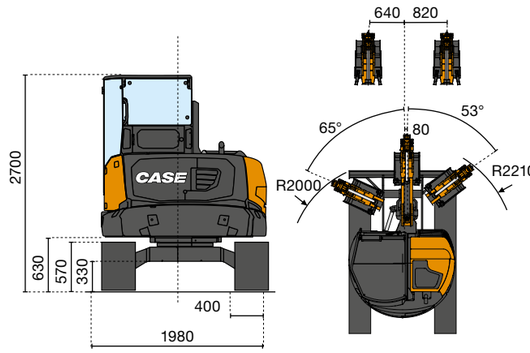

Opening arm from the rotation's center (m).
Lifting capacity (ton) at 1.0 m height.
Standard counterweight.




Standard dipper stick L = 1650 mm


LIFTING CAPACITY	3	4	5	Max
Frontal and lowered dozer blade	3.31*	2.20*	1.74*	1.62*
Frontal and lifted dozer blade	1.71	1.11	0.80	0.72
Lateral	1.19	0.80	0.58	0.52

* Indicates the hydraulic load limit.


CX65D

Standard arm (Long arm)

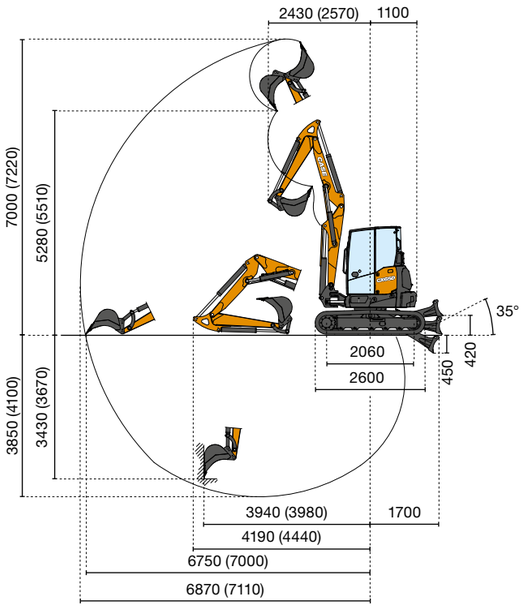

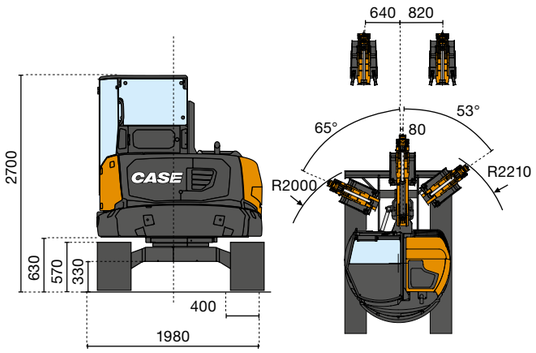

Opening arm from the rotation's center (m).
Lifting capacity (ton) at 1.0 m height.
Standard counterweight.



Standard dipper stick L = 1650 mm

LIFTING CAPACITY	3	4	5	Max
Frontal and lowered dozer blade	2.60*	2.07*	1.69*	1.28*
Frontal and lifted dozer blade	2.02	1.24	0.86	0.64
Lateral	1.43	0.89	0.61	0.45

* Indicates the hydraulic load limit.

The lifting capacity is based on the ISO 10567 and it does not exceed more than the 75% of static tipping load or more than the 87% of the hydraulic lifting capacity of the machine.

The lifting capacity is based on the ISO 10567 and it does not exceed more than the 75% of static tipping load or more than the 87% of the hydraulic lifting capacity of the machine.

BUILDING ON OUR HERITAGE.

Since 1842, at CASE Construction Equipment we have lived by an unwavering commitment to build practical, intuitive solutions that deliver both efficiency and productivity.

The vast CASE dealers' network is always ready to support and protect your investment. At the end of the day, we do what's right for our customers and our communities so that they can count on CASE.

Form No. 20291GB - MediaCross Firenze - 07/26

CNH Industrial
Deutschland GmbH
Case Baumaschinen
Benzstr. 1-3 - D-74076 - Heilbronn
DEUTSCHLAND

CNH Industrial
Maquinaria Spain, S.A.
Avenida Aragón 402
28022 Madrid
ESPAÑA

CNH Industrial France, S.A.
16-18 Rue des Rochettes
91150 Morigny-Champigny
FRANCE

CNH Industrial Italia Spa
Lungo Stura Lazio 19
10156, Torino
ITALIA

CASE Construction Equipment
Cranes Farm Rd
Basildon - SS14 3AD
UNITED KINGDOM

NOTE: Standard and optional fittings can vary according to the demands and specific regulations of each country. The illustrations may include optional rather than standard fittings - consult your Case dealer. Furthermore, CNH Industrial reserves the right to modify machine specifications without incurring any obligation relating to such changes.

Conforms to directive 2006/42/EC

CASECE.COM
00800-2273-7373

The call is free from a land line.
Check in advance with your Mobile Operator if you will be charged. Toll free number not available from all calling areas.